

RCV160i


160mm Wire Rope Cutter

Part No – AS00077

- **Versatile:** Perfect for deep sea operations or deck-mounted planned production cutting
- **Dependable:** Designed to cut the toughest wire rope
- **Easy to use:** Hydraulically operated anvil for fast ROV deployment
- **Durable:** Engineered to last in the harshest of environments
- **Built in safety:** Integrated interlock prevents incorrect operation and minimises the risk of tool damage
- **Powerful:** Integrated minibooster gives maximum cutting power even when using low powered HPUs
- **Reliable:** Proven Webtool technology gives cutting edge performance

Contact our engineering team to arrange cut trials or to discuss bespoke designs.

All products are made in the UK.

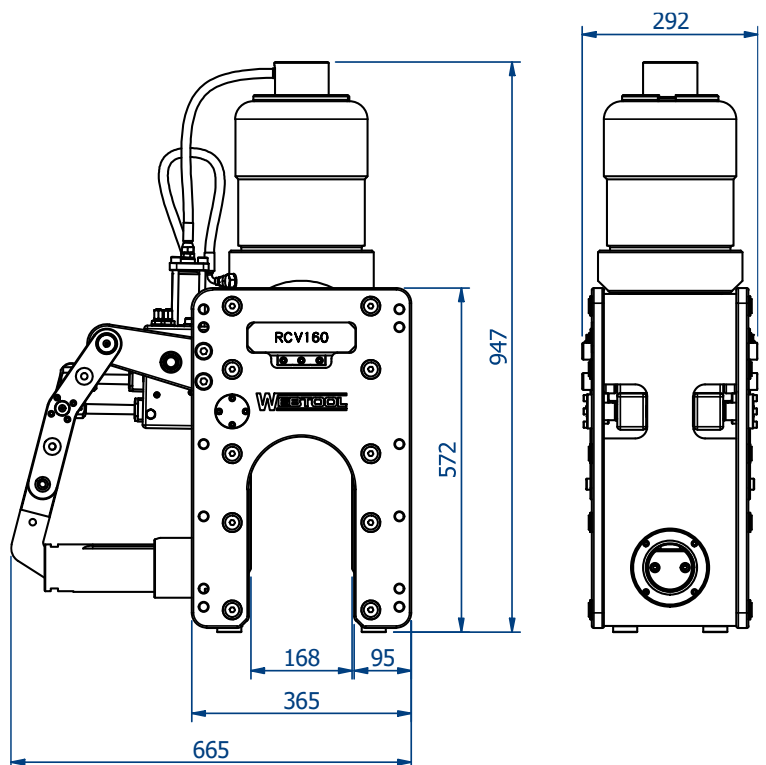

www.allspeeds.co.uk

Webtool – A division of Allspeeds
Royal Works, Atlas Street
Clayton-Le-Moors, Accrington,
Lancashire. BB5 5LW
UK Tel: +44 (0) 1254 615 100
Email: info@allspeeds.co.uk

Technical Specifications

- Maximum Ø160mm cutting capacity
- 210 bar maximum input pressure
- Approx weight in air: 278kg
- Approx weight in water: 240kg
- Swept volume cut stroke: 3.7 litres
- Swept volume return stroke: 1.6 litres

Spare Parts and consumables

- Seal Kit (995284)
- Blade (705054C)
- Anvil (SSC6491)
- Filter (PT00292)

Additional Extras

Hydraulic Hoses



High quality hydraulic hoses to suit Webtool cutters or bespoke applications. Available in a range of pressure ratings and end fittings.

HTP – Hydrostatic Test Pump



Hydrostatic test pump complete with tank, skid, handle and pressure gauge. Perfect for testing any hydraulic equipment. Available in a range of pressures up to 1000 bar.